

a brand of Mosaicnet srl

Via Panaro 20, 41042 Fiorano Modenese (MO) ITALY  
Tel. +39 0536911408 - Fax +39 05361940223  
www.terratinta.com - info@terratinta.com

**DECLARATION OF PERFORMANCE**  
**According Annex III of the Regulation (EU) No. 305/2011**  
**No. 001ICPFA06-2013**

1. Unique identification code of the product-type:  
Dry-pressed ceramic tiles, with water absorption  $E_b \leq 0,5\%$  - Stonevolution
2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):  
Batch number: see packaging of the product
3. Intended use or use(s) of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:  
For internal and external walls and floorings
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):  
Mosaicnet srl - Terratinta Ceramiche  
via Panaro 20, 41042 Fiorano Modenese (MO)
5. System or systems of assessment and verification of constancy of performance (AVCP) of the construction product as set out Annex V:  
System 4
6. Name and identification number of notified laboratory, if relevant: Not applicable
7. Declared performance

Essential characteristic	Performance	Harmonised technical specification
<b>Reaction to fire</b>	<b>A1<sub>FL</sub>/A1</b>	EN 14411:2012
<b>Release of dangerous substance, for</b>		
- Cadmium	<b>NPD</b>	
- Lead	<b>NPD</b>	
<b>Breaking strength</b>	<b>&gt; 1300 N</b> (Thickness $\geq 7,5$ mm)	
<b>Slipperiness</b>	See table attached	
<b>Tactility</b>	<b>NDP</b>	
<b>Bond strength/adhesion, for</b>		
Cementitious adhesive, type C2	$\geq 1,0$ N/mm <sup>2</sup>	
<b>Thermal shock resistance</b>	<b>Pass</b>	
<b>Durability of bond strength as:</b>		
- Internal use:	<b>Pass</b>	

a brand of Mosalcnnet srl

Via Panaro 20, 41042 Fiorano Modenese (MO) ITALY  
Tel. +39 0536911408 - Fax +39 05361940223  
www.terratinta.com - info@terratinta.com

Essential characteristic	Performance	Harmonised technical specification
- External use: freeze-thaw resistance	<b>Pass</b>	

The performance of the product identified in points 1 is in conformity with the declared performance in point 7.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

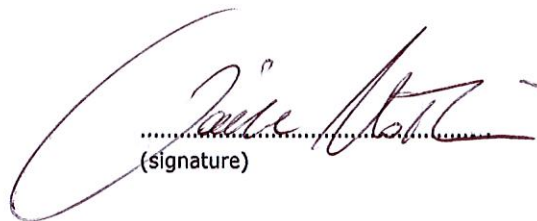
Signed for and on behalf of the manufacturer by:

**Davide Notolieri, Quality Manager**

.....  
(name and function)

Fiorano (MO), 06/06/2013

.....  
(place and date of issue)

  
.....  
(signature)